

■ Ryco T2000 Hose End Catalog



COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

HOSE COMPATIBILITY FOR T2000 SERIES

NON-SKIVE

For RYCO Hose Series T3000A, T3000D, T3000S, T3600A, T3600D, T3600S, T4000A, T4000D, T4000S, T5000A, T5000D, T5000S, T6000A, T6000D, T6000S, T1A, T1D, T1F, T1S, T2A, T2D, T2S, T2C, TXA2D, DF2A, RQP1, RQP2, TW1, PW2, E2, BT1, TJ2D, CS1000 and MS1000.

BSP




T2010 (T201)

T2013 (T201P)

T2017 (T201C)

T2020 (T202)

60° SEAT
EXCEPT T2017
ENCAPSULATED SEAL
INCLUDED



HOSE SIZE		THRD SIZE	DASH SIZE	BSPT MALE		BSPP MALE		BSPP MALE ENCAPSULATED SEAL		BSPP FEMALE	
DN	inch	inch		PART NO	C _A	PART NO	C _A	PART NO	C _A	PART NO	C _A
5	3/16	1/8	-0302	T2010-0302	25	T2013-0302	25				
6	1/4	1/8	-0402	T2010-0402	25	T2013-0402	24			T2020-0402	23
6	1/4	1/4	-0404	T2010-0404	30	T2013-0404	27	T2017-0404	30	T2020-0404	24
6	1/4	3/8	-0406	T2010-0406	30	T2013-0406	30			T2020-0406	26
6	1/4	1/2	-0408	T2010-0408	32						
8	5/16	1/4	-0504			T2013-0504	27			T2020-0504	22
8	5/16	3/8	-0506	T2010-0506	30	T2013-0506	30			T2020-0506	24
8	5/16	1/2	-0508	T2010-0508	32						
10	3/8	1/4	-0604	T2010-0604	33					T2020-0604	22
10	3/8	3/8	-0606	T2010-0606	33	T2013-0606	33	T2017-0606	33	T2020-0606	26
10	3/8	1/2	-0608	T2010-0608	38	T2013-0608	32			T2020-0608	28
12	1/2	3/8	-0806	T2010-0806	35					T2020-0806	25
12	1/2	1/2	-0808	T2010-0808	40	T2013-0808	31	T2017-0808	37	T2020-0808	26
12	1/2	5/8	-0810	T2010-0810	40	T2013-0810	34				
12	1/2	3/4	-0812							T2020-0812	30
16	5/8	1/2	-1008	T2010-1008	41					T2020-1008	27
16	5/8	5/8	-1010	T2010-1010	41	T2013-1010	34			T2020-1010	26
16	5/8	3/4	-1012	T2010-1012	41	T2013-1012	40			T2020-1012	28
19	3/4	3/4	-1212	T2010-1212	41	T2013-1212	40	T2017-1212	40	T2020-1212	28
19	3/4	1	-1216	T2010-1216	46					T2020-1216	33
25	1	1	-1616	T2010-1616	48	T2013-1616	45	T2017-1616	45	T2020-1616	38
25	1	1.1/4	-1620							T2020-1620	40
31	1.1/4	1.1/4	-2020	T2010-2020	53	T2013-2020	51	T2017-2020	51	T2020-2020	43
38	1.1/2	1.1/2	-2424	T2010-2424	55					T2020-2424	45
51	2	2	-3232	T2010-3232	66					T2020-3232	54
63	2.1/2	2.1/2	-4040	T2010-4040						T2020-4040	

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS



BSP

T2320
(T232)

T2340
(T234)

T2028B
(T202S)

60° SEAT



HOSE SIZE		THRD SIZE	DASH SIZE	BSPT MALE SWIVEL		BSPT MALE SWIVEL 90° ELBOW			BSP FEMALE LIVE SWIVEL	
DN	inch	inch		PART NO	C _A	PART NO	C _A	DL	PART NO	C _A
6	1/4	1/4	-0404						T2028B-0404	40
10	3/8	1/4	-0604						T2028B-0604	41
10	3/8	3/8	-0606	T2320-0606	49	T2340-0606	23	44		
10	3/8	1/2	-0608	T2320-0608	53	T2340-0608	23	48		
12	1/2	1/2	-0808	T2320-0808	55	T2340-0808	29	50		
19	3/4	3/4	-1212			T2340-1212	30	54		

NOTE: These "Live Swivel" T2320, T2340 and T2020S Series Couplings are for Maximum Working Pressure: 420 bar (6100 psi): -04 & -06 Thread Size, 350 bar (5100 psi): -08 Thread Size, 280 bar (4100 psi): -12 Thread Size, 215 bar (3100 psi): -16 Thread Size. Their swivel capability is to allow easy installation and orientation and avoid twisting of hose. They are not designed for continuous rotation or continuous movement.




BSP

T2024
(T202F)

T2220
(T222)

T2120
(T212)

SPECIAL SEATS



HOSE SIZE		THRD SIZE	DASH SIZE	BSP FEMALE FLAT FACE		BSP MALE 60° CONVEX SEAT (JIS)		BSP FEMALE 60° CONCAVE SEAT (JIS)	
DN	inch	inch		PART NO	C _A	PART NO	C _A	PART NO	C _A
6	1/4	1/4	-0404			T222-0404	31	T2120-0404	21
10	3/8	3/8	-0606			T222-0606	35	T2120-0606	22
10	3/8	1/2	-0608	T2024-0608	22			T2120-0608	26
12	1/2	1/2	-0808	T2024-0808	22	T222-0808	39	T2120-0808	27
19	3/4	3/4	-1212					T2120-1212	26
25	1	1	-1616					T2120-1616	32




COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

BSP

T2475

STRAIGHT



HOSE SIZE		THRD SIZE	DASH SIZE	BSP BANJO	
DN	inch	inch		PART NO	C _A
6	1/4	1/4	-0404	T2475-0404	25
8	5/16	3/8	-0506	T2475-0506	27
10	3/8	3/8	-0606	T2475-0606	27
10	3/8	1/2	-0608	T2475-0608	28
12	1/2	1/2	-0808	T2475-0808	29
16	5/8	5/8	-1010	T2475-1010	30
19	3/4	3/4	-1212	T2475-1212	37
25	1	1	-1616	T2475-1616	45



NOTE: Other configurations available on request. For BBB Banjo Bolt see page 366 and RL21D Seal see page 309.

BSP

**T2060
(T206)**

**T2050
(T205)**

60° SEAT




HOSE SIZE		THRD SIZE	DASH SIZE	BSPP FEMALE 45° ELBOW		BSPP FEMALE 90° ELBOW			
DN	inch	inch		PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	1/4	-0404	T2060-0404	30	15	T2050-0404	21	24
6	1/4	3/8	-0406				T2050-0406	21	28
8	5/16	3/8	-0506				T2050-0506	23	28
10	3/8	3/8	-0606	T2060-0606	36	18	T2050-0606	23	28
10	3/8	1/2	-0608				T2050-0608	23	31
12	1/2	1/2	-0808	T2060-0808	40	18	T2050-0808	29	31
19	3/4	3/4	-1212	T2060-1212	44	20	T2050-1212	30	36
25	1	1	-1616	T2060-1616	51	23	T2050-1616	32	40
31	1.1/4	1.1/4	-2020	T2060-2020	42	25	T2050-2020	43	49
38	1.1/2	1.1/2	-2424				T2050-2424	60	59
51	2	2	-3232				T2050-3232	56	62

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

BSP	T2270 (T227)	T2260 (T226)	T2210 (T221)
------------	-------------------------	-------------------------	-------------------------

60° SEAT

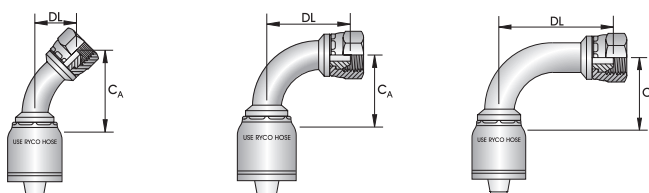

HOSE SIZE		THRD SIZE	DASH SIZE	BSPP FEMALE 45° TUBE BEND			BSPP FEMALE 90° TUBE BEND			BSPP FEMALE 90° LONG BEND		
DN	inch	inch		PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	1/8	-0402				T2260-0402	27	29			
6	1/4	1/4	-0404	T2270-0404	35	17	T2260-0404	27	29	T2210-0404	25	47
6	1/4	3/8	-0406				T2260-0406	27	28			
8	5/16	1/4	-0504				T2260-0504	27	29			
8	5/16	3/8	-0506	T2270-0506	44	19	T2260-0506	35	34			
10	3/8	3/8	-0606	T2270-0606	43	18	T2260-0606	35	34	T2210-0606	32	55
10	3/8	1/2	-0608	T2270-0608	45	19	T2260-0608	34	33			
12	1/2	1/2	-0808	T2270-0808	49	22	T2260-0808	40	45	T2210-0808	38	70
12	1/2	5/8	-0810	T2270-0810	49	23	T2260-0810	40	45	T2210-0810	40	72
16	5/8	5/8	-1010	T2270-1010	55	23	T2260-1010	49	50	T2210-1010	44	81
16	5/8	3/4	-1012	T2270-1012	58	28						
19	3/4	3/4	-1212	T2270-1212	70	29	T2260-1212	55	58	T2210-1212	52	96
25	1	1	-1616	T2270-1616	85	41	T2260-1616	67	72	T2210-1616	65	116
31	1.1/4	1	-2016				T2260-2016	69	77			
31	1.1/4	1.1/4	-2020	T2270-2020	105	46	T2260-2020	90	91	T2210-2020	86	142
	1.3/8	1.1/2	-2224	T2270-2224	118	52	T2260-2224	100	106			
38	1.1/2	1.1/2	-2424	T2270-2424	118	52	T2260-2424	104	105			
51	2	2	-3232	T2270-3232	142	65	T2260-3232	137	132			



COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

NPT





T2090
(T209)

T2091
(T209E)

T2320N
(T232N)

T2340N
(T234N)

60° SEAT




HOSE SIZE		THRD SIZE	DASH SIZE	NPT MALE	NPT MALE EXTENDED	NPT MALE SWIVEL	NPT MALE SWIVEL 90° ELBOW			
DN	inch	inch		PART NO	CA	PART NO	CA	PART NO	CA	DL
5	3/16	1/8	-0302	T2090-0302	24					
5	3/16	1/4	-0304	T2090-0304	30					
6	1/4	1/8	-0402	T2090-0402	25			T2320N-0402	42	
6	1/4	1/4	-0404	T2090-0404	30			T2320N-0404	42	T2340N-0404 21 41
6	1/4	3/8	-0406	T2090-0406	30	T2091-0406	38	T2320N-0406	41	
6	1/4	1/2	-0408	T2090-0408	32					
8	5/16	1/4	-0504	T2090-0504	30					
8	5/16	3/8	-0506	T2090-0506	30					
10	3/8	1/4	-0604	T2090-0604	33			T2320N-0604	39	
10	3/8	3/8	-0606	T2090-0606	33	T2091-0606	41	T2320N-0606	41	T2340N-0606 23 41
10	3/8	1/2	-0608	T2090-0608	38			T2320N-0608	45	
12	1/2	3/8	-0806	T2090-0806	35			T2320N-0806	42	
12	1/2	1/2	-0808	T2090-0808	40			T2320N-0808	46	T2340N-0808 29 51
12	1/2	3/4	-0812	T2090-0812	37					
16	5/8	1/2	-1008	T2090-1008	41					
16	5/8	3/4	-1012	T2090-1012	41					
19	3/4	1/2	-1208	T2090-1208	41					
19	3/4	3/4	-1212	T2090-1212	41			T2320N-1212	47	T2340N-1212 30 55
19	3/4	1	-1216	T2090-1216	43					
25	1	3/4	-1612	T2090-1612	43					
25	1	1	-1616	T2090-1616	48			T2320N-1616	58	T2340N-1616 32 73
25	1	1.1/4	-1620	T2090-1620	46					
31	1.1/4	1	-2016	T2090-2016	52					
31	1.1/4	1.1/4	-2020	T2090-2020	53					
38	1.1/2	1.1/2	-2424	T2090-2424	55					
51	2	2	-3232	T2090-3232	56					

NOTE: These "Live Swivel" T2320N and T2340N Series Couplings are for Maximum Working Pressure: 420 bar (6100 psi): -04 & -06 Thread Size, 350 bar (5100 psi): -08 Thread Size, 280 bar (4100 psi): -12 Thread Size, 215 bar (3100 psi): -16 Thread Size. Their swivel capability is to allow easy installation and orientation and avoid twisting of hose. They are not designed for continuous rotation or continuous movement.

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

NPT T2190 (T219) T2020N (T202N)


60° SEAT

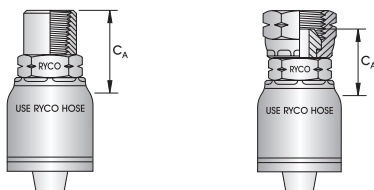

HOSE SIZE		THRD SIZE	DASH SIZE	NPT FIXED FEMALE		NPSM FEMALE	
DN	inch	inch		PART NO	CA	PART NO	CA
6	1/4	1/8	-0402			T2020N-0402	
6	1/4	1/4	-0404	T2190-0404	26	T2020N-0404	24
6	1/4	3/8	-0406	T2190-0406	28		
10	3/8	1/4	-0604			T2020N-0604	22
10	3/8	3/8	-0606	T2190-0606	29	T2020N-0606	27
10	3/8	1/2	-0608	T2190-0608	33	T2020N-0608	28
12	1/2	3/8	-0806	T2190-0806	28		
12	1/2	1/2	-0808	T2190-0808	34	T2020N-0808	29
16	5/8	3/4	-1012	T2190-1012	37		
19	3/4	3/4	-1212	T2190-1212	36	T2020N-1212	28
25	1	1	-1616			T2020N-1616	33
31	1.1/4	1.1/4	-2020			T2020N-2020	41
38	1.1/2	1.1/2	-2424			T2020N-2424	45
51	2	2	-3232			T2020N-3232	54

CROCBITE T2880 T2881 T2882

CROCBITE
HIGH PRESSURE

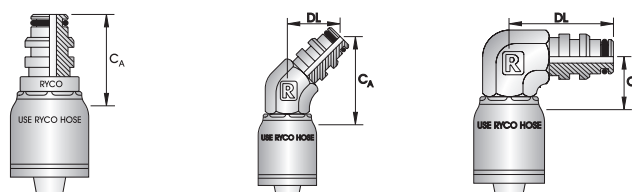

HOSE SIZE		MWP	DASH SIZE	CROCBITE MALE		CROCBITE MALE 45° ELBOW			CROCBITE MALE 90° ELBOW		
DN	inch	bar		PART NO	CA	PART NO	CA	DL	PART NO	CA	DL
10	3/8	450	-0610	T2880-0610	39	T2881-0610	43	28	T2882-0610	23	49
12	1/2	450	-0812	T2880-0812	39	T2881-0812	45	28	T2882-0812	29	51
19	3/4	420	-1220	T2880-1220	48	T2881-1220	58	34	T2882-1220	35	60
25	1	420	-1625	T2880-1625	65	T2881-1625	73	48	T2882-1625	45	84
31	1.1/4	420	-2032	T2880-2032	68	T2881-2032	77	50	T2882-2032	52	94
38	1.1/2	420	-2440	T2880-2440	71	T2881-2440	88	53	T2882-2440	61	101
51	2	420	-3250	T2880-3250	97	T2881-3250	107	73	T2882-3250	66	135
63	2.1/2	350	-4063	T2880-4063	97	T2881-4063	114	75	T2882-4063	80	146


COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

CROCBITE

T2880A

CROCBITE
HIGH FLOW




HOSE SIZE		MWP	DASH SIZE	CROCBITE MALE	
DN	inch	bar		PART NO	C _A
51	2	350	-3250	T2880A-3250	94
63	2.1/2	280	-4063	T2880A-4063	93
76	3	215	-4875	T2880A-4875	

GREASE LINE

T2861 (T286)

60° SEAT



HOSE SIZE		THRD SIZE	DASH SIZE	GREASE LINE FIXED FEMALE	
DN	inch	inch		PART NO	C _A
6	1/4	1/2-27TPI	-0408	T2861-0408	23

JIC





T2030 (T203)

T2040 (T204)

T2080 (T208)

T2070 (T207)

37° FLARE



HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	JIC MALE		JIC FEMALE		JIC FEMALE 45° ELBOW		JIC FEMALE 90° ELBOW			
DN	inch	inch	inch		PART NO	C _A	PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
5	3/16	7/16	1/4	-0307			T2040-0307	22				T2070-0307	22	17
6	1/4	3/8	3/16	-0406			T2040-0406	22						
6	1/4	7/16	1/4	-0407	T2030-0407	29	T2040-0407	22	T2080-0407	27	10	T2070-0407	21	17
6	1/4	1/2	5/16	-0408	T2030-0408	29	T2040-0408	22	T2080-0408	27	11	T2070-0408	21	17
6	1/4	9/16	3/8	-0409	T2030-0409	30	T2040-0409	22	T2080-0409	27	11	T2070-0409	21	22
6	1/4	3/4	1/2	-0412	T2030-0412	32	T2040-0412	23						
8	5/16	1/2	5/16	-0508	T2030-0508	29	T2040-0508	22						
8	5/16	9/16	3/8	-0509	T2030-0509	30	T2040-0509	22						
10	3/8	7/16	1/4	-0607			T2040-0607	22						
10	3/8	9/16	3/8	-0609	T2030-0609	32	T2040-0609	22	T2080-0609	30	13	T2070-0609	23	22
10	3/8	3/4	1/2	-0612	T2030-0612	35	T2040-0612	24	T2080-0612	31	14	T2070-0612	23	24
10	3/8	7/8	5/8	-0614	T2030-0614	37	T2040-0614	27						
12	1/2	9/16	3/8	-0809			T2040-0809	24						
12	1/2	3/4	1/2	-0812	T2030-0812	37	T2040-0812	25	T2080-0812	32	14	T2070-0812	29	26
12	1/2	7/8	5/8	-0814	T2030-0814	39	T2040-0814	27	T2080-0814	33	15	T2070-0814	29	28
12	1/2	1.1/16	3/4	-0817	T2030-0817	42	T2040-0817	29				T2070-0817	29	30
16	5/8	3/4	1/2	-1012			T2040-1012	26						
16	5/8	7/8	5/8	-1014	T2030-1014	41	T2040-1014	28						
16	5/8	1.1/16	3/4	-1017	T2030-1017	43	T2040-1017	29						
19	3/4	7/8	5/8	-1214			T2040-1214	29						
19	3/4	1.1/16	3/4	-1217	T2030-1217	43	T2040-1217	30	T2080-1217	37	16	T2070-1217	30	31
19	3/4	1.3/16	7/8	-1219	T2030-1219	44	T2040-1219	31						
19	3/4	1.5/16	1	-1221	T2030-1221	45	T2040-1221	34						
25	1	1.1/16	3/4	-1617			T2040-1617	33						
25	1	1.5/16	1	-1621	T2030-1621	47	T2040-1621	36	T2080-1621	42	20	T2070-1621	32	36
25	1	1.5/8	1.1/4	-1626	T2030-1626	48								
31	1.1/4	1.5/8	1.1/4	-2026	T2030-2026	52	T2040-2026	44						
38	1.1/2	1.7/8	1.1/2	-2430	T2030-2430	57	T2040-2430	49						
51	2	2.1/2	2	-3240	T2030-3240	73	T2040-3240	60						
63	2.1/2	3	2.1/2	-4048	T2030-4048		T2040-4048	39						

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

JIC





T2250
(T225)

T2243
(T224S)

T2240
(T224)

T2280
(T228)

37° FLARE





HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	JIC FEMALE 45° TUBE BEND			JIC FEMALE 90° SHORT BEND			JIC FEMALE 90° MEDIUM BEND			JIC FEMALE 90° LONG BEND		
DN	inch	inch	inch		PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	7/16	1/4	-0407	T2250-0407	31	10	T2243-0407	27	21	T2240-0407	26	32	T2280-0407	43	47
6	1/4	1/2	5/16	-0408	T2250-0408	40	12				T2240-0408	26	32			
6	1/4	9/16	3/8	-0409	T2250-0409	40	12	T2243-0409	27	22	T2240-0409	26	38	T2280-0409	47	54
8	5/16	9/16	3/8	-0509	T2250-0509	39	11				T2240-0509	35	38			
10	3/8	7/16	1/4	-0607							T2240-0607	27	25			
10	3/8	9/16	3/8	-0609	T2250-0609	39	11	T2243-0609	31	21	T2240-0609	35	38	T2280-0609	52	54
10	3/8	3/4	1/2	-0612	T2250-0612	42	15				T2240-0612	35	41	T2280-0612	59	64
12	1/2	3/4	1/2	-0812	T2250-0812	45	15	T2243-0812	43	29	T2240-0812	41	41	T2280-0812	53	64
12	1/2	7/8	5/8	-0814	T2250-0814	48	18				T2240-0814	41	47	T2280-0814	54	70
12	1/2	1.1/16	3/4	-0817	T2250-0817	47	21				T2240-0817	41	45			
16	5/8	3/4		-1012							T2240-1012	43	41			
16	5/8	7/8	5/8	-1014	T2250-1014	50	19	T2243-1014	43	32	T2240-1014	48	47	T2280-1014	51	70
16	5/8	1.1/16	3/4	-1017	T2250-1017	52	24				T2240-1017	48	57	T2280-1017	51	96
19	3/4	7/8	5/8	-1214							T2240-1214	48	48			
19	3/4	1.1/16	3/4	-1217	T2250-1217	65	22				T2240-1217	55	57	T2280-1217	56	96
19	3/4	1.5/16	1	-1221	T2250-1221	74	28				T2240-1221	55	71			
25	1	1.5/16	1	-1621	T2250-1621	77	30				T2240-1621	68	73	T2280-1621	75	114
25	1	1.5/8	1.1/4	-1626							T2240-1626	68	78			
31	1.1/4	1.5/8	1.1/4	-2026	T2250-2026	97	39				T2240-2026	88	82	T2280-2026	86	129
38	1.1/2	1.7/8		-2430	T2250-2430	121	50				T2240-2430	106	106	T2280-2430	104	141
51	2	2.1/2		-3240	T2250-3240	152	63				T2240-3240	136	132	T2280-3240	136	222

JIS

T2220
(T222)

T2120
(T212)

JAPANESE INDUSTRIAL
STANDARD (JIS)
BSPP THREAD FORM
60° CONVEX / CONCAVE SEAT



HOSE SIZE		THRD SIZE	DASH SIZE	BSPP MALE 60° CONVEX SEAT (JIS)		BSPP FEMALE 60° CONCAVE SEAT (JIS)	
DN	inch	inch		PART NO	C _A	PART NO	C _A
6	1/4	1/4	-0404	T2220-0404	31	T2120-0404	21
10	3/8	3/8	-0606	T2220-0606	35	T2120-0606	22
10	3/8	1/2	-0608			T2120-0608	26
12	1/2	1/2	-0808	T2220-0808	39	T2120-0808	27
19	3/4	3/4	-1212			T2120-1212	26
25	1	1	-1616			T2120-1616	32

NOTE: These T2220 and T2120 Series Couplings are also listed in the BSP section on page 189.


COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

JIS

T2680
(T268)

JAPANESE INDUSTRIAL
STANDARD (JIS)
"KOMATSU"
METRIC THREAD FORM
60° CONCAVE SEAT




HOSE SIZE		THRD SIZE	DASH SIZE	METRIC FEMALE 60° CONCAVE SEAT (JIS)	
DN	inch	inch		PART NO	C _A
6	1/4	14x1,5	-0414	T2680-0414	20
8	5/16	16x1,5	-0516	T2680-0516	20
10	3/8	18x1,5	-0618	T2680-0618	22
10	3/8	22x1,5	-0622	T2680-0622	26
12	1/2	22x1,5	-0822	T2680-0822	25
12	1/2	24x1,5	-0824	T2680-0824	32
16	5/8	24x1,5	-1024	T2680-1024	25
16	5/8	30x1,5	-1030	T2680-1030	30
19	3/4	24x1,5	-1224	T2680-1224	27
19	3/4	30x1,5	-1230	T2680-1230	30
19	3/4	33x1,5	-1233	T2680-1233	30
25	1	33x1,5	-1633	T2680-1633	28
31	1.1/4	36x1,5	-2036	T2680-2036	31
31	1.1/4	42x1,5	-2042	T2680-2042	32

NOTE: These T2680 Series Couplings are also listed in the **METRIC** section on page 200.

METRIC

T2650
(T265)


DKL
METRIC (LIGHT)
24° CONE



HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	DKL MALE 24° CONE	
DN	inch	mm	mm		PART NO	C _A
6	1/4	12x1,5	6	-0412	T2650-0412	25
6	1/4	14x1,5	8	-0414	T2650-0414	25
6	1/4	16x1,5	10	-0416	T2650-0416	26
8	5/16	16x1,5	10	-0516	T2650-0516	29
8	5/16	18x1,5	12	-0518	T2650-0518	26
10	3/8	16x1,5	10	-0616	T2650-0616	29
10	3/8	18x1,5	12	-0618	T2650-0618	29
10	3/8	22x1,5	15	-0622	T2650-0622	24
12	1/2	22x1,5	15	-0822	T2650-0822	32
12	1/2	26x1,5	18	-0826	T2650-0826	32
16	5/8	26x1,5	18	-1026	T2650-1026	29
19	3/4	30x2,0	22	-1230	T2650-1230	31
25	1	36x2,0	28	-1636	T2650-1636	37

JOINER

T2900
(T290)



HOSE SIZE		THRD SIZE	DASH SIZE	JOINER	
DN	inch	inch		PART NO	C _A
6	1/4	1/4	-0404	T2900-0404	14
8	5/16	5/16	-0505	T2900-0505	14
10	3/8	3/8	-0606	T2900-0606	15
12	1/2	1/2	-0808	T2900-0808	15
16	5/8	5/8	-1010	T2900-1010	15
19	3/4	3/4	-1212	T2900-1212	15
25	1	1	-1616	T2900-1616	25
31	1.1/4	1.1/4	-2020	T2900-2020	25
38	1.1/2	1.1/2	-2424	T2900-2424	26
51	2	2	-3232	T2900-3232	26
63	2.1/2	2.1/2	-4040	T2900-4040	26
76	3	3	-4848	T2900-4848	

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS




METRIC

T2600
(T260)

T2660
(T266)

T2670
(T267)

DKL
METRIC (LIGHT)
RYCO DKL FEMALE SWIVELS
UP TO M26 SIZE HAVE
MULTISEAL DKL 24° AND DKM
60° CONE. M30 AND OVER HAVE
DKL 24° CONE ONLY.



HOSE SIZE				THRD SIZE	TUBE SIZE	DASH SIZE	DKL FEMALE 24°/60° CONE	DKL FEMALE 24°/60° CONE 45° TUBE BEND	DKL FEMALE 24°/60° CONE 90° TUBE BEND			
DN	inch	mm	mm		PART NO	C _A	PART NO	CA	DL	PART NO	C _A	DL
6	1/4	12x1,5	6	-0412	T2600-0412	21	T2660-0412	36	18	T2670-0412	27	31
6	1/4	14x1,5	8	-0414	T2600-0414	21	T2660-0414	36	17	T2670-0414	27	31
6	1/4	16x1,5	10	-0416	T2600-0416	23				T2670-0416	27	32
8	5/16	16x1,5	10	-0516	T2600-0516	23	T2660-0516	45	20	T2670-0516	35	35
8	5/16	18x1,5	12	-0518	T2600-0518	25						
10	3/8	16x1,5	10	-0616	T2600-0616	23	T2660-0616	45	20	T2670-0616	35	35
10	3/8	18x1,5	12	-0618	T2600-0618	23	T2660-0618	45	20	T2670-0618	35	35
12	1/2	22x1,5	15	-0822	T2600-0822	25	T2660-0822	60	22	T2670-0822	40	44
12	1/2	26x1,5	18	-0826	T2600-0826	26	T2660-0826	50	22	T2670-0826	41	53
16	5/8	26x1,5	18	-1026	T2600-1026	26	T2660-1026	60	28	T2670-1026	48	53
19	3/4	30x2,0	22	-1230	T2600-1230	26	T2660-1230	73	32	T2670-1230	56	64
25	1	36x2,0	28	-1636	T2600-1636	28	T2660-1636	82	42	T2670-1636	69	73
31	1.1/4	45x2,0	35	-2045	T2600-2045	34						




METRIC

T2501
(T250 & T250R)

T2510
(T251)

T2520
(T252)

DKOL
METRIC O RING (LIGHT)
24° CONE



HOSE SIZE				THRD SIZE	TUBE SIZE	DASH SIZE	DKOL FEMALE 24° CONE	DKOL FEMALE 24° CONE 45° TUBE BEND	DKOL FEMALE 24° CONE 90° TUBE BEND			
DN	inch	mm	mm		PART NO	C _A	PART NO	CA	DL	PART NO	C _A	DL
6	1/4	12x1,5	6	-0412	T2501-0412	21	T2510-0412	36	18	T2520-0412	26	31
6	1/4	14x1,5	8	-0414	T2501-0414	22	T2510-0414	35	17	T2520-0414	26	31
6	1/4	16x1,5	10	-0416	T2501-0416	22						
8	5/16	14x1,5	8	-0514	T2501-0514	22						
8	5/16	16x1,5	10	-0516	T2501-0516	23	T2510-0516	45	20	T2520-0516	35	35
8	5/16	18x1,5	12	-0518	T2501-0518	23	T2510-0518	45	20	T2520-0518	35	35
10	3/8	16x1,5	10	-0616	T2501-0616	23	T2510-0616	45	20	T2520-0616	36	35
10	3/8	18x1,5	12	-0618	T2501-0618	23	T2510-0618	45	20	T2520-0618	36	35
12	1/2	22x1,5	15	-0822	T2501-0822	26	T2510-0822	51	22	T2520-0822	40	44
12	1/2	26x1,5	18	-0826	T2501-0826	29	T2510-0826	53	24	T2520-0826	40	48
16	5/8	26x1,5	18	-1026	T2501-1026	26	T2510-1026	59	28	T2520-1026	48	54
19	3/4	26x1,5	18	-1226	T2501-1226	28						
19	3/4	30x2,0	22	-1230	T2501-1230	27	T2510-1230	73	31	T2520-1230	56	65
25	1	36x2,0	28	-1636	T2501-1636	33	T2510-1636	91	46	T2520-1636	69	79
31	1.1/4	45x2,0	35	-2045	T2501-2045		T2510-2045	101	40	T2520-2045	88	72
38	1.1/2	52x2,0	42	-2452	T2501-2452		T2510-2452			T2520-2452		


COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

METRIC

T2630
(T263)

DKS
METRIC (HEAVY)
24° CONE



HOSE SIZE	THRD SIZE	TUBE SIZE	DASH SIZE	DKS MALE 24° CONE	PART NO	C _A
6	1/4	16x1,5	8	-0416	T2630-0416	27
6	1/4	18x1,5	10	-0418	T2630-0418	23
8	5/16	20x1,5	12	-0520	T2630-0520	30
10	3/8	20x1,5	12	-0620	T2630-0620	30
10	3/8	22x1,5	14	-0622	T2630-0622	29
12	1/2	24x1,5	16	-0824	T2630-0824	30
16	5/8	30x2,0	20	-1030	T2630-1030	31
19	3/4	30x2,0	20	-1230	T2630-1230	35
19	3/4	36x2,0	25	-1236	T2630-1236	37
25	1	42x2,0	30	-1642	T2630-1642	43
31	1.1/4	52x2,0	38	-2052	T2630-2052	47




METRIC

T2711
(T271)

T2720
(T272)

T2730
(T273)

DKOS
METRIC O RING (HEAVY)
24° CONE





HOSE SIZE	THRD SIZE	TUBE SIZE	DASH SIZE	DKOS FEMALE 24° CONE	DKOS FEMALE 24° CONE 45° TUBE BEND	DKOS FEMALE 24° CONE 90° TUBE BEND
6	1/4	14x1,5	6	-0414	T2711-0414	T2730-0414
6	1/4	16x1,5	8	-0416	T2711-0416	T2730-0416
6	1/4	18x1,5	10	-0418	T2711-0418	T2730-0418
8	5/16	18x1,5	10	-0518	T2711-0518	
8	5/16	20x1,5	12	-0520	T2711-0520	T2730-0520
10	3/8	20x1,5	12	-0620	T2711-0620	T2730-0620
10	3/8	22x1,5	14	-0622	T2711-0622	T2730-0622
10	3/8	24x1,5	16	-0624	T2711-0624	
12	1/2	24x1,5	16	-0824	T2711-0824	T2730-0824
16	5/8	30x2,0	20	-1030	T2711-1030	T2730-1030
19	3/4	30x2,0	20	-1230	T2711-1230	T2730-1230
19	3/4	36x2,0	25	-1236	T2711-1236	T2730-1236
25	1	42x2,0	30	-1642	T2711-1642	T2730-1642
31	1.1/4	52x2,0	38	-2052	T2711-2052	T2730-2052

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

METRIC **T2920**
(T292) **T2921**
(T292F) **T2923**
(T292G)


FRENCH GAZ
24° CONE



HOSE SIZE				METRIC FRENCH GAZ MALE		METRIC FRENCH GAZ FEMALE		METRIC FRENCH GAZ FEMALE 90° TUBE BEND				
DN	inch	mm	mm	THRD SIZE	DASH SIZE	PART NO	C _A	PART NO	C _A	PART NO	C _A	DL
6	1/4	20x1,5	13,25		-0420							
8	5/16	20x1,5	13,25		-0520							
10	3/8	20x1,5	13,25		-0620							
12	1/2	24x1,5	16,75		-0824							
16	5/8	30x1,5	21,25		-1030							
19	3/4	36x1,5	26,75		-1236							
25	1	45x1,5	33,50		-1645							

METRIC **T2924**
(T292M) **T2925**
(T292N)

FRENCH MILLIMETRIC
24° CONE



HOSE SIZE				METRIC FRENCH MILLIMETRIC MALE		METRIC FRENCH MILLIMETRIC FEMALE			
DN	inch	mm	mm	THRD SIZE	DASH SIZE	PART NO	C _A	PART NO	C _A
16	5/8	27x1,5	20		-1027				
19	3/4	30x1,5	22		-1230				
19	3/4	33x1,5	25		-1233				
19	3/4	36x1,5	28		-1236				
25	1	36x1,5	28		-1636				
25	1	39x1,5	30		-1639				


COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

METRIC

T2680 (T268)

JAPANESE INDUSTRIAL
STANDARD (JIS)
"KOMATSU"
METRIC THREAD FORM
60° CONCAVE SEAT




HOSE SIZE		THRD SIZE	DASH SIZE	METRIC FEMALE 60° CONCAVE SEAT (JIS)	
DN	inch	mm		PART NO	C _A
6	1/4	14x1,5	-0414	T2680-0414	20
8	5/16	16x1,5	-0516	T2680-0516	20
10	3/8	18x1,5	-0618	T2680-0618	22
10	3/8	22x1,5	-0622	T2680-0622	26
12	1/2	22x1,5	-0822	T2680-0822	25
12	1/2	24x1,5	-0824	T2680-0824	32
16	5/8	24x1,5	-1024	T2680-1024	25
16	5/8	30x1,5	-1030	T2680-1030	30
19	3/4	24x1,5	-1224	T2680-1224	27
19	3/4	30x1,5	-1230	T2680-1230	30
19	3/4	33x1,5	-1233	T2680-1233	30
25	1	33x1,5	-1633	T2680-1633	30
31	1.1/4	36x1,5	-2036	T2680-2036	31
31	1.1/4	42x1,5	-2042	T2680-2042	32

NOTE: These T2680 Series Couplings are also listed in the JIS section on page 196.

METRIC

T2470

STRAIGHT





HOSE SIZE		THRD SIZE	DASH SIZE	METRIC BANJO	
DN	inch	mm		PART NO	C _A
6	1/4	12	-0412	T2470-0412	23
6	1/4	14	-0414	T2470-0414	25
8	5/16	14	-0514	T2470-0514	25
8	5/16	16	-0516	T2470-0516	26
10	3/8	12	-0612	T2470-0612	26
10	3/8	14	-0614	T2470-0614	27
10	3/8	16	-0616	T2470-0616	27
10	3/8	18	-0618	T2470-0618	29
10	3/8	20	-0620	T2470-0620	30
10	3/8	22	-0622	T2470-0622	30
12	1/2	18	-0818	T2470-0818	30
12	1/2	22	-0822	T2470-0822	30
16	5/8	22	-1022	T2470-1022	30
16	5/8	26	-1026	T2470-1026	31
19	3/4	26	-1226	T2470-1226	38
19	3/4	30	-1230	T2470-1230	
19	3/4	36	-1236	T2470-1236	
25	1	30	-1630	T2470-1630	38
25	1	36	-1636	T2470-1636	

NOTE: Other configurations available on request. For BBM Banjo Bolt see page 366 and MBD Seal see page 337.

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

ORFS	T2840 (T284)	T2800 (T280)
-------------	-------------------------	-------------------------

**O RING
FACE SEAL**



					ORFS MALE		ORFS FEMALE	
HOSE SIZE	THRD SIZE	TUBE SIZE	DASH SIZE		PART NO	C _A	PART NO	C _A
6	1/4	9/16	1/4	-0409	T2840-0409	25	T2800-0409	28
6	1/4	11/16	3/8	-0411	T2840-0411	26	T2800-0411	32
8	5/16	11/16	3/8	-0511			T2800-0511	33
10	3/8	9/16	1/4	-0609			T2800-0609	29
10	3/8	11/16	3/8	-0611	T2840-0611	29	T2800-0611	31
10	3/8	13/16	1/2	-0613	T2840-0613	31	T2800-0613	34
12	1/2	11/16	3/8	-0811			T2800-0811	31
12	1/2	13/16	1/2	-0813	T2840-0813	33	T2800-0813	34
12	1/2	1	5/8	-0816	T2840-0816	36	T2800-0816	40
12	1/2	1.3/16	3/4	-0819			T2800-0819	43
16	5/8	1	5/8	-1016	T2840-1016	37	T2800-1016	38
16	5/8	1.3/16	3/4	-1019	T2840-1019	38	T2800-1019	43
19	3/4	1	5/8	-1216			T2800-1216	38
19	3/4	1.3/16	3/4	-1219	T2840-1219	38	T2800-1219	43
19	3/4	1.7/16	1	-1223	T2840-1223	38	T2800-1223	52
25	1	1.7/16	1	-1623	T2840-1623	41	T2800-1623	54
31	1.1/4	1.11/16	1.1/4	-2027	T2840-2027	45	T2800-2027	59

COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

ORFS





T2810
(T281)

T2823
(T282S)

T2820
(T282)

T2830
(T283)

O RING
FACE SEAL




HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	ORFS FEMALE 45° TUBE BEND			ORFS FEMALE 90° SHORT BEND			ORFS FEMALE 90° MEDIUM BEND			ORFS FEMALE 90° LONG BEND		
DN	inch	inch	inch		PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	9/16	1/4	-0409	T2810-0409	39	18	T2823-0409	27	21	T2820-0409	28	32	T2830-0409	28	47
6	1/4	11/16	3/8	-0411	T2810-0411	39	18	T2823-0411	26	26	T2820-0411	28	38	T2830-0411	28	55
8	5/16	11/16	3/8	-0511							T2820-0511	34	38			
10	3/8	11/16	3/8	-0611	T2810-0611	45	20	T2823-0611	32	24	T2820-0611	34	38	T2830-0611	32	54
10	3/8	13/16	1/2	-0613	T2810-0613	40	17	T2823-0613	35	29	T2820-0613	34	41	T2830-0613	32	64
12	1/2	13/16	1/2	-0813	T2810-0813	49	19	T2823-0813	43	30	T2820-0813	41	41	T2830-0813	42	65
12	1/2	1	5/8	-0816	T2810-0816	46	19	T2823-0816	42	35	T2820-0816	43	47	T2830-0816	46	70
12	1/2	1.3/16	3/4	-0819				T2823-0819	42	48	T2820-0819	41	58	T2830-0819	46	96
16	5/8	1	5/8	-1016	T2810-1016	59	20	T2823-1016	40	32	T2820-1016	47	47	T2830-1016	51	70
16	5/8	1.3/16	3/4	-1019	T2810-1019	58	24	T2823-1019	40	48	T2820-1019	46	58	T2830-1019	50	96
19	3/4	13/16	1/2	-1213							T2820-1213	41	41			
19	3/4	1.3/16	3/4	-1219	T2810-1219	64	29	T2823-1219	56	49	T2820-1219	54	59	T2830-1219	58	96
19	3/4	1.7/16	1	-1223	T2810-1223	60	26	T2823-1223	55	56	T2820-1223	54	71	T2830-1223	55	114
25	1	1.7/16	1	-1623	T2810-1623	86	34	T2823-1623	64	56	T2820-1623	67	71	T2830-1623	81	113
31	1.1/4	1.11/16	1.1/4	-2027	T2810-2027	125	45	T2823-2027			T2820-2027	84	90	T2830-2027	87	129

PW

T2940
(T294)

PRESSURE WASHER
SUITS KARCHER STYLE




HOSE SIZE		THRD SIZE	DASH SIZE	PW FEMALE	
DN	inch	inch		PART NO	CA
6	1/4	22x1,5	-0422	T2940-0422	30
8	5/16	22x1,5	-0522	T2940-0522	30
10	3/8	22x1,5	-0622	T2940-0622	30

PW

T2950
(T295)

PRESSURE WASHER
SUITS KARCHER STYLE



HOSE SIZE		TUBE OD	DASH SIZE	PW GUN HANDLE TUBE	
DN	inch	inch		PART NO	CA
6	1/4	9,8	-0410	T2950-0410	39
10	3/8				



T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

RKVP

T2896

T2899

RKVP
HIGH PRESSURE





HOSE SIZE				RKVP SIZE	MAX WP	DASH SIZE	RKVP MALE		RKVP FEMALE	
DN	inch	mm	bar				PART NO	C _A	PART NO	C _A
10	3/8	10	450	-0610			T2896-0610	51	T2899-0610	34
12	1/2	12	450	-0812			T2896-0812	53	T2899-0812	37
16	5/8	20	420	-1020			T2896-1020	57	T2899-1020	38
19	3/4	20	420	-1220			T2896-1220	56	T2899-1220	39
25	1	25	420	-1625			T2896-1625	51	T2899-1625	47
31	1.1/4	32	420	-2032			T2896-2032	70	T2899-2032	57
38	1.1/2	40	420	-2440			T2896-2440	88	T2899-2440	61
51	2	50	420	-3250			T2896-3250	85	T2899-3250	63
63	2.1/2	63	350	-4063			T2896-4063	111	T2899-4063	78

RKVF

T2890

T2894

RKVF
HIGH FLOW



HOSE SIZE				RKVF SIZE	MAX WP	DASH SIZE	RKVF MALE		RKVF FEMALE	
DN	inch	mm	bar				PART NO	C _A	PART NO	C _A
51	2	50	165	-3250			T2890-3250	77	T2894-3250	54
63	2.1/2	63	70	-4063			T2890-4063	77	T2894-4063	53
76	3	75	70	-4875			T2890-4875		T2894-4875	

COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS




RYCO WEO

T2480
(T248)

T2482
(T248B)

T2483
(T248C)

RYCO WEO



HOSE SIZE			PLUG-IN SIZE		MAX WORKING PRESSURE		RYCO WEO MALE	RYCO WEO MALE 45° TUBE BEND	RYCO WEO MALE 90° TUBE BEND					
DN	Dash	inch	DN	inch	bar	psi	PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
5	-03	3/16	6	1/4	350	5100	T2480-0304	31						
6	-04	1/4	6	1/4	350	5100	T2480-0404	31	T2482-0404	44	25	T2483-0404	29	40
6	-04	1/4	10	3/8	350	5100	T2480-0406	35						
8	-05	5/16	10	3/8	350	5100	T2480-0506	35	T2482-0506	54	27	T2483-0506	35	52
10	-06	3/8	10	3/8	350	5100	T2480-0606	35	T2482-0606	55	27	T2483-0606	35	52
10	-06	3/8	12	1/2	350	5100	T2480-0608	35				T2483-0608	35	54
12	-08	1/2	12	1/2	350	5100	T2480-0808	36	T2482-0808	59	31	T2483-0808	38	58
12	-08	1/2	19	3/4	350	5100	T2480-0812	47						
16	-10	5/8	19	3/4	350	5100	T2480-1012	45	T2482-1012	72	40	T2483-1012	44	73
19	-12	3/4	19	3/4	350	5100	T2480-1212	45	T2482-1212	82	43	T2483-1212	54	82
25	-16	1	25	1	250	3600	T2480-1616	56	T2482-1616	105	53	T2483-1616	72	97

NOTE: RYCO WEO male and female couplings and adaptors do not contain a shut-off valve. When not in use, cap the RYCO WEO male using the appropriate size RW811 series stop cap and plug the RYCO WEO female/cartridge using the appropriate size RW723 series stop plug.




STAPLELOK

T2870
(T287)

T2871
(T288)

T2872
(T289)

STAPLE O RING & BACK UP RING SUPPLIED







HOSE SIZE			STAPLE SIZE	DASH SIZE	STAPLELOK MALE	STAPLELOK MALE 45° ELBOW	STAPLELOK MALE 90° ELBOW					
DN	inch	mm			PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	6	-0406		T2870-0406	39	T2871-0406	44	28	T2872-0406	21	46
6	1/4	10	-0410		T2870-0410	39	T2871-0410	45	28	T2872-0410	22	46
10	3/8	10	-0610		T2870-0610	38	T2871-0610	43	28	T2872-0610	21	46
12	1/2	13	-0812		T2870-0812	41	T2871-0812	47	28	T2872-0812	31	50
12	1/2	16	-0816		T2870-0816	41						
16	5/8	13	-1012		T2870-1012	39						
16	5/8	16	-1016		T2870-1016	39	T2871-1016	45	28	T2872-1016	34	53
19	3/4	20	-1220		T2870-1220	38	T2871-1220	57	33	T2872-1220	35	56
25	1	25	-1625		T2870-1625	50	T2871-1625	63	37	T2872-1625	45	68
31	1.1/4	32	-2032		T2870-2032	50	T2871-2032	65	37	T2872-2032	50	68
38	1.1/2	40	-2440		T2870-2440	60	T2871-2440	82	44	T2872-2440	61	85
51	2	50	-3250		T2870-3250	58	T2871-3250	87	46	T2872-3250	64	95
63	2.1/2	63	-4063		T2870-4063	93	T2871-4063	112	69	T2872-4063	80	137
76	3	75	-4875		T2870-4875							

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

SAE T2530 (T253) T2540 (T254) T2580 (T258) T2570 (T257)





45° FLARE



HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	SAE MALE		SAE FEMALE		SAE FEMALE 45° ELBOW			SAE FEMALE 90° ELBOW		
DN	inch	inch	inch		PART NO	C _A	PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	7/16	1/4	-0407			T2540-0407	19						
6	1/4	5/8	3/8	-0410	T2530-0410	31	T2540-0410	21						
10	3/8	1/2	5/16	-0608	T2530-0608	32	T2540-0608	20	T2580-0608	32	14	T2570-0608	23	22
10	3/8	5/8	3/8	-0610	T2530-0610	34	T2540-0610	20	T2580-0610	32	15	T2570-0610	23	23
19	3/4	1.1/16	3/4	-1217			T2540-1217	26						

SAE T2740 (T274) T2780 (T278) T2790 (T279) T2750 (T275)



INVERTED MALE FLARE



HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	SAE INVERTED MALE FLARE		SAE INVERTED MALE FLARE 90° ELBOW		SAE INVERTED MALE FLARE 90° EXTENDED ELBOW			SAE INVERTED MALE FLARE 45° TUBE BEND			
DN	inch	inch	inch		PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	7/16	1/4	-0407	T2740-0407	40									
10	3/8	5/8	3/8	-0610	T2740-0610	41	T2780-0610	18	32	T2790-0610	18	60	T2750-0610	74	23
10	3/8	11/16	7/16	-0611	T2740-0611	45	T2780-0611	18	36						

SAE T2760 (T276) T2770 (T277)

INVERTED MALE FLARE




HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	SAE INVERTED MALE FLARE 60° TUBE BEND			SAE INVERTED MALE FLARE 90° TUBE BEND		
DN	inch	inch	inch		PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	7/16	1/4	-0407	T2760-0407	63	29	T2770-0407	44	38
10	3/8	5/8	3/8	-0610				T2770-0610	56	50

COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

DIMENSIONS FOR SAE CODE 61 AND CODE 62 FLANGES, AND RYCO CODE 62C FLANGES

NOMINAL FLANGE	CODE 61				CODE 62				CODE 62C				
	B		T		B		T		B		T		
inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
1/2	30,2	1.19	6,73	0.265	31,8	1.25	7,75	0.305					
*5/8	34,0	1.34	6,73	0.265									
3/4	38,1	1.50	6,73	0.265	41,3	1.63	8,76	0.345	41,3	1.63	14,20	0.559	
1	44,5	1.75	8,00	0.315	47,6	1.88	9,53	0.375	47,6	1.88	14,20	0.559	
1.1/4	50,8	2.00	8,00	0.315	54,0	2.12	10,29	0.405	54,0	2.12	14,20	0.559	
1.1/2	60,3	2.38	8,00	0.315	63,5	2.50	12,57	0.495	63,5	2.50	14,20	0.559	
2	71,4	2.81	9,53	0.375	79,4	3.13	12,57	0.495	79,4	3.13	14,20	0.559	
2.1/2	84,1	3.31	9,53	0.375									
3	101,6	4.00	9,53	0.375									



NOTE: *5/8 is used by Komatsu.

RYCO Code 62C fittings conform to the flange OD and bolt hole patterns of SAE Code 62 but require special flange clamps.
RYCO Code 62C flange heads are thicker than SAE Code 62 and measure T = 14,2 mm (0.559 inch) in all sizes.




SAE FLANGE

T2130
(T213)

T2150
(T215)

T2170
(T217)

RYCO
CODE 61
CLAMPS - SEE PAGES 345 & 346
***[5/8 KOMATSU]**
O RING NOT SUPPLIED




HOSE SIZE		NOM. FLANGE SIZE	DASH SIZE	CODE 61 FLANGE	CODE 61 FLANGE 45° TUBE BEND	CODE 61 FLANGE 90° TUBE BEND					
DN	inch	inch		PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
12	1/2	1/2	-0808	T2130-0808	45	T2150-0808	49	20	T2170-0808	41	41
12	1/2	3/4	-0812	T2130-0812	47	T2150-0812	51	24	T2170-0812	41	46
16	5/8	*5/8	-1010	T2130-1010	43	T2150-1010	56	24	T2170-1010	47	48
19	3/4	*5/8	-1210	T2130-1210	45	T2150-1210	56	26			
19	3/4	3/4	-1212	T2130-1212	46	T2150-1212	65	26	T2170-1212	55	54
19	3/4	1	-1216	T2130-1216	50	T2150-1216	69	30	T2170-1216	55	60
25	1	1	-1616	T2130-1616	52	T2150-1616	81	30	T2170-1616	68	68
25	1	1.1/4	-1620	T2130-1620	57	T2150-1620	83	32	T2170-1620	70	69
25	1	1.1/2	-1624	T2130-1624	84	T2150-1624	85	33			
31	1.1/4	1	-2016	T2130-2016	85	T2150-2016	88	30	T2170-2016	78	68
31	1.1/4	1.1/4	-2020	T2130-2020	59	T2150-2020	100	36	T2170-2020	88	78
31	1.1/4	1.1/2	-2024	T2130-2024	85	T2150-2024	102	38	T2170-2024	88	81
38	1.1/2	1.1/2	-2424	T2130-2424	86	T2150-2424	115	42	T2170-2424	104	93
51	2	2	-3232	T2130-3232	96	T2150-3232	150	58	T2170-3232	137	130
63	2.1/2	2.1/2	-4040	T2130-4040	79	T2150-4040			T2170-4040		
76	3	3	-4848	T2130-4848							

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

SALVAGE

T2230
(T223)

TUBE WELD



HOSE SIZE		A	DASH SIZE	SALVAGE (LIFESAVER)	
DN	inch	inch		PART NO	C _A
6	1/4	1/4	-0404	T2230-0404	18
6	1/4	5/16	-0405	T2230-0405	18
6	1/4	3/8	-0406	T2230-0406	18
10	3/8	3/8	-0606	T2230-0606	19
10	3/8	1/2	-0608	T2230-0608	19
12	1/2	1/2	-0808	T2230-0808	19
12	1/2	5/8	-0810	T2230-0810	21
16	5/8	5/8	-1010	T2230-1010	21
16	5/8	3/4	-1012	T2230-1012	21
19	3/4	3/4	-1212	T2230-1212	21
25	1	1	-1616	T2230-1616	27
31	1.1/4	1.1/4	-2020	T2230-2020	31
38	1.1/2	1.1/2	-2424	T2230-2424	41
51	2	2	-3232	T2230-3232	41

STANDPIPE

T2180
(T218)

IMPERIAL



HOSE SIZE		TUBE SIZE	DASH SIZE	IMPERIAL STANDPIPE	
DN	inch	inch		PART NO	C _A
6	1/4	3/8	-0406	T2180-0406	34
10	3/8	3/8	-0606	T2180-0606	35
12	1/2	1/2	-0808	T2180-0808	32
12	1/2	5/8	-0810	T2180-0810	42
19	3/4	3/4	-1212	T2180-1212	51
25	1	1	-1616	T2180-1616	57



STANDPIPE

T2640
(T264)

T2643
(T264B)

T2646
(T264C)

METRIC



HOSE SIZE		TUBE SIZE	DASH SIZE	METRIC STANDPIPE	METRIC STANDPIPE 45° TUBE BEND			METRIC STANDPIPE 90° TUBE BEND			
DN	inch	mm		PART NO	C _A	PART NO	C _A	DL	PART NO	C _A	DL
6	1/4	6	-0406	T2640-0406	31						
6	1/4	8	-0408	T2640-0408	31						
6	1/4	10	-0410	T2640-0410	32						
6	1/4	12	-0412	T2640-0412	32						
8	5/16	10	-0510	T2640-0510	32						
8	5/16	12	-0512	T2640-0512	32						
10	3/8	12	-0612	T2640-0612	32						
10	3/8	14	-0614	T2640-0614	38						
12	1/2	15	-0815	T2640-0815	39						
12	1/2	16	-0816	T2640-0816	39						
16	5/8	16	-1016	T2640-1016	39						
16	5/8	18	-1018	T2640-1018	35						
16	5/8	20	-1020	T2640-1020	45						
19	3/4	20	-1220	T2640-1220	45						
19	3/4	22	-1222	T2640-1222	37						
19	3/4	25	-1225	T2640-1225	45						

NOTE: See page 337 for DKL and DKS Metric Nuts and Olives for use with Metric Standpipe Fittings.


COUPLINGS

T2000 (T200) SERIES BITELOK ONE-PIECE CRIMP COUPLINGS

TUBE BITE

T2850
(T285)

COMPLETE WITH NUT
AND FLARELESS OLIVE



HOSE SIZE		TUBE SIZE	DASH SIZE	TUBE BITE	
DN	inch	inch		PART NO	C _A
6	1/4	1/4	-0404	T2850-0404	27
6	1/4	5/16	-0405	T2850-0405	27
10	3/8	5/16	-0605	T2850-0605	30
10	3/8	3/8	-0606	T2850-0606	30
10	3/8	1/2	-0608	T2850-0608	32
12	1/2	1/2	-0808	T2850-0808	34
12	1/2	5/8	-0810	T2850-0810	36
19	3/4	3/4	-1212	T2850-1212	39
25	1	1	-1616	T2850-1616	41




UNO (O RING BOSS)

T2200
(T220)

T2380
(T238)

T2390
(T239)

O RING SUPPLIED



HOSE SIZE		THRD SIZE	TUBE SIZE	DASH SIZE	UN O RING MALE	UN O RING MALE SWIVEL	UN O RING MALE SWIVEL 90° ELBOW				
DN	inch	inch	inch		PART NO	C _A	PART NO	C _A	PART NO	C _A	DL
6	1/4	7/16	1/4	-0407	T2200-0407	25					
6	1/4	1/2	5/16	-0408	T2200-0408	25					
6	1/4	9/16	3/8	-0409	T2200-0409	25					
10	3/8	9/16	3/8	-0609	T2200-0609	28	T2380-0609	41	T2390-0609	23	36
10	3/8	3/4	1/2	-0612	T2200-0612	29	T2380-0612	41	T2390-0612	23	41
10	3/8	7/8	5/8	-0614	T2200-0614	28			T2390-0614	23	38
12	1/2	3/4	1/2	-0812	T2200-0812	31	T2380-0812	42	T2390-0812	29	43
12	1/2	7/8	5/8	-0814	T2200-0814	33	T2380-0814	43	T2390-0814	29	40
12	1/2	1.1/16	3/4	-0817	T2200-0817	32	T2380-0817	42			
16	5/8	7/8	5/8	-1014	T2200-1014	34	T2380-1014	42			
16	5/8	1.1/16	3/4	-1017	T2200-1017	32					
19	3/4	1.1/16	3/4	-1217	T2200-1217	36	T2380-1217	44	T2390-1217	30	44
19	3/4	1.5/16	1	-1221	T2200-1221	34					
25	1	1.5/16	1	-1621	T2200-1621	39					
31	1.1/4	1.5/8	1.1/4	-2026	T2200-2026	43					

NOTE: These "Live Swivel" **T2380** and **T2390** Series Inserts are for Maximum Working Pressure: 350 bar (5100 psi); -09 & -12 Thread Size, 280 bar (4100 psi); -14 & -17 Thread Size. Their swivel capability is to allow easy installation and orientation and avoid twisting of hose. They are not designed for continuous rotation or continuous movement.